



# KEY FEATURES



## SMOOTH RIDE

A high-end suspension fork allows you to effortlessly glide over bumps in the road. A simple lockout switch saves energy when you don't need the suspension.

## EASY PEDALING

A larger front chainring and deluxe 10-speed drivetrain provide fluid shifting and comfortable pedaling – even at high speeds.



## STOP ON A DIME

Top of the line hydraulic disc brakes stop on a dime with the greatest of ease. The levers are easier to pull than normal disk brakes, and they feel more responsive.

## BREATHTAKING PERFORMANCE

- A whisper quiet, 749 watt motor delivers best in class acceleration and hill climbing. The sensation of power it gives you is exhilarating.
- A state-of-the-art 52 Volt battery uses the same advanced lithium-ion cells as an electric car. It weighs less than a housecat and can take you up to 60 miles on about 10 cents worth of electricity.



Try one free! Find a dealer at [pedego.com](http://pedego.com)

**PEDEGO**<sup>®</sup>  
ELECTRIC BIKES

# SMALL DETAILS MAKE A BIG DIFFERENCE



## 1. Throttle

Twist-and-go throttle with color LED indicator for maximum safety.



## 4. Bright Lights

Built-in front and rear lights for your safety and convenience.



## 2. Adjustable Handlebars

Quick-release handlebar stem allows you to find a perfect fit.



## 5. PedalSense®

Twist-and-go throttle, 5 levels of pedal assist, and LCD display with USB charger.



## 3. Full Coverage

A full coverage chain guard and fenders with mud flaps keep you clean and dry.



## 6. Balloon Tires

Kevlar-belted tires help prevent flats and give you a nice, smooth ride.

## More Notes...

---

---

Try one free! Find a dealer at [pedego.com](http://pedego.com)



# CITY COMMUTER: PLATINUM EDITION

## SPECIFICATIONS

### Electronics

MOTOR	BLACK 52V BRUSHLESS GEARED REAR HUB MOTOR; 749 WATT NOMINAL POWER RATING; 60NM TORQUE; QUICK DISCONNECT CABLE WITH WATERPROOF CONNECTION.
BATTERY	52 VOLT 17.5 OR 10.5 AMP HOUR WITH PREMIUM LITHIUM ION 18650 CELLS; SMART BIKE TECHNOLOGY WITH CANBUS COMMUNICATION; AUTO SLEEP FUNCTION.
CHARGER	52V 2 AMP PEDEGO FANLESS BATTERY CHARGER WITH CHARGE INDICATOR LIGHT.
CONTROLLER	52 VOLT 22 AMP SINE WAVE CONTROLLER WITH CUSTOM PEDALSENSE® SOFTWARE AND WATERPROOF CONNECTIONS.
THROTTLE	CUSTOM PEDEGO TWIST AND GO THROTTLE WITH COLOR LED ASSIST INDICATOR FOR MAXIMUM SAFETY; THREADED WATERPROOF CONNECTION.
PEDALSENSE®	FREE RIDE MODE (NO POWER), FIVE LEVELS OF PEDAL ASSIST WITH THROTTLE OVERRIDE AND TORQUE OR CADENCE MODE, THROTTLE ONLY MODE.
TOP SPEED	CLASS 2: 20 MPH MAX, WITH PEDAL ASSIST AND THROTTLE ASSIST CLASS 3: 28 MPH MAX, WITH PEDAL ASSIST ONLY (SOFTWARE UPGRADE AVAILABLE THROUGH PEDEGO DEALER ONLY).
DISPLAY	3.5" BACKLIT LCD SCREEN WITH CANBUS COMMUNICATION; 4 BUTTONS TO CONTROL ELECTRONICS, TOGGLE INFO DISPLAYED, AND CUSTOMIZE SETTINGS; USB CHARGING PORT; WATERPROOF THREADED CONNECTION; CUSTOM PEDALSENSE® SOFTWARE.

### Drivetrain

DERAILLEUR	SHIMANO SLX M7000 10 SPEED; INTEGRATED CLUTCH FOR MAXIMUM CHAIN RETENTION; RIDER TUNED FOR SHARP AND SILKY SHIFTS; MODEL NO: RD-M7000-10-SGS.
CASSETTE	SHIMANO DEORE M6000 10 SPEED HYPERGLIDE 11-36T; PRECISE AND CONSISTENT SHIFTING PERFORMANCE; MODEL NO: CS-HG50-10.
SHIFTER	SHIMANO SLX M670 10 SPEED; DYNA-SYS WITH OPTICAL GEAR DISPLAY; MODEL NO: SL-M670-R.
BOTTOM BRACKET	68MM x 127.5MM SQUARE TAPER SPINDLE WITH SEALED CARTRIDGE BEARINGS; INTEGRATED TORQUE SENSOR.
CHAIN	S10 SPEED KMC X10E; RUSTBUSTER TREATMENT; 132 LINKS.
CRANK	BLACK 3 PIECE CRANK WITH 5x130MM 52T 3/32" CHAINRING; 170MM FORGED ALUMINUM CRANK ARMS.
PEDALS	BLACK PEDEGO ALUMINUM PLATFORM PEDAL; 9/16" SPINDLE; POLYMER DU BUSHING; INTEGRATED PEDAL REFLECTORS.

Try one free! Find a dealer at [pedego.com](https://pedego.com)



# SPECIFICATIONS

## Brakes

CALIPERS	TEKTRO DORADO; 2 PISTON HYDRAULIC DISC BRAKE WITH FORGED ALUMINUM BODY, ADJUSTABLE HOSE ANGLE; TEKTRO NON-CORROSIVE MINERAL OIL.
LEVERS	TEKTRO DORADO FORGED ALUMINUM LEVER; 4 FINGER BLADE WITH BALL END; VISUALIZED RESERVOIR; INTEGRATED MOTOR CUTOFF SWITCH FOR MAXIMUM SAFETY.
PADS	CERAMIC MATERIAL WITH STEEL BACKING PLATE; OFFER SAFETY TOGETHER WITH EXCELLENT PERFORMANCE IN ALL SITUATIONS.
ROTORS	TEKTRO WAVE TYPE; 180MM DIAMETER; STIFFNESS, HIGH HEAT DISPERSION AND HEAT TOLERANCE; COMPATIBLE WITH ALL PAD COMPOUNDS.

## Components

FRAME	6061-T6 ALUMINUM ALLOY; INTEGRATED REINFORCED REAR RACK FOR BATTERY AND STORAGE; INTERNAL CABLE AND WIRE ROUTING.
FORK	26" OR 28" AIR SPRUNG SUSPENSION FORK; 60MM OR 50MM TRAVEL; ADJUSTABLE COMPRESSION WITH HYDRAULIC LOCKOUT.
HEADSET	ZERO STACK SEMI-INTEGRATED 1 1/8" THREADED; ZS44/28.6-26TPI   ZS44/30.
SEATPOST	BLACK 27.2MM x 350MM COIL SPRUNG SUSPENSION SEATPOST WITH 40MM OF TRAVEL AND ADJUSTABLE PRELOAD.
SADDLE	EXTRA WIDE CRUISER STYLE SADDLE WITH SOFT FOAM; REAR FACING PEDEGO LOGO; 265MM L x 265MM W.
RIMS	24" OR 26" ALUMINUM ALLOY DOUBLE WALL RIMS; 24.7MM INTERNAL WIDTH; PINNED JOINT; 3D ANGLE DRILLED SPOKE HOLES; 12G X 36 HOLE.
SPOKES	BLACK 12 GAUGE HEAVY DUTY STAINLESS STEEL SPOKES WITH BRASS NIPPLES.
GRIPS	PEDEGO SYNTHETIC LEATHER GRIP WITH HAND STITCHING AND FOAM PADDING; COLOR MATCHED BALLOON PACKAGE.
HANDLEBAR	BLACK ERGONOMIC CITY STYLE; ALUMINUM ALLOY; 25.4MM CLAMP DIAMETER; 650MM WIDTH.
STEM	BLACK QUICK RELEASE ADJUSTABLE QUILL STYLE; 110MM LENGTH; 0-80 DEGREE ADJUSTABLE ANGLE; 25.4MM HANDLEBAR CLAMP DIAMETER; HEIGHT ADJUSTABLE 0-60MM; FOR 1 1/8" (28.6MM) THREADED STEERER TUBE.
TIRES	SCHWALBE FAT FRANK 28" x 2.0" WITH K-GUARD KEVLAR FLAT PROTECTION OR SCHWALBE BIG APPLE 26" x 2.0" WITH RACEGUARD FLAT PROTECTION; SLIME INNER TUBE SEALANT; SCHRADER VALVE.

Try one free! Find a dealer at [pedego.com](https://pedego.com)



# SPECIFICATIONS

## Extras

### LIGHTS

FRONT: LED WITH ADJUSTABLE MOUNT 60 LUX;  
REAR: LED BUILT INTO BATTERY WITH BRAKE LIGHT AND TURN SIGNAL FUNCTIONS; BOTH POWERED BY MAIN BATTERY AND CONTROLLED BY LCD.

### KICKSTAND

BLACK ALUMINUM ALLOY CENTER KICKSTAND; ADJUSTABLE LENGTH COMPOSITE FOOT.

### TOOL KIT

CUSTOM PEDEGO TOOL KIT: 6" ADJUSTABLE WRENCH (UP TO 15MM), 12/13G SPOKE WRENCH, T25 TORX WRENCH, 6MM HEX WRENCH, 5MM HEX WRENCH WITH #2 PHILLIPS SCREWDRIVER, 4MM HEX WRENCH.

### FENDERS

MATTE BLACK STEEL FULL LENGTH FENDERS WITH INTEGRATED MUD FLAPS; STAINLESS STEEL STAYS.

## Weight

### BIKE (NO BATTERY)

STEP THRU 26": 52 LB; STEP THRU 28": 55.2 LB; CLASSIC 28": 55.8 LB.

### BATTERY


52V/15Ah: 9.2 LB; 52V/10Ah: 8.8 LB.

*\*All bicycle weights do not include a battery. Due to manufacturing tolerances of the individual components the overall bike weight may vary +/- 5%.*

# DIMENSIONS

## City Commuter Step-Thru 26"

### BIKE DIMENSIONS GUIDE

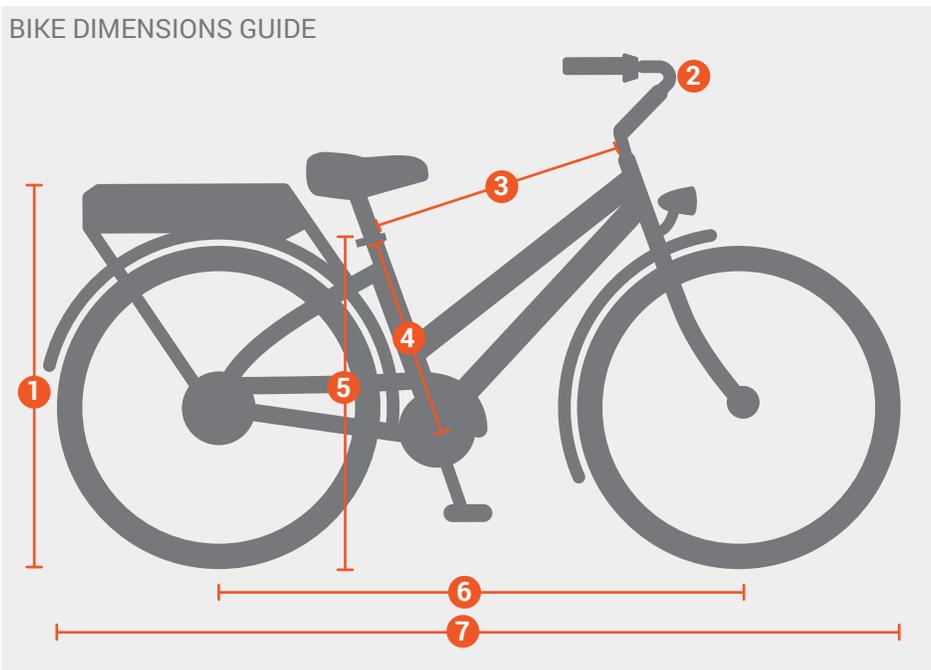


- 1 REAR HEIGHT**  
31" (787mm)
- 2 HANDLEBAR WIDTH**  
26" (660mm)
- 3 SEAT TUBE TO HANDSET**  
21" (533mm)
- 4 SEAT CLAMP TO CRANK**  
15" (381mm)
- 5 SEAT CLAMP TO GROUND**  
26.5" (673mm)
- 6 AXLE TO AXLE**  
45" (1143mm)
- 7 END TO END**  
70" (1778mm)

Try one free! Find a dealer at [pedego.com](https://pedego.com)

**PEDEGO**<sup>®</sup>  
ELECTRIC BIKES


# DIMENSIONS

## City Commuter Step-Thru 28"

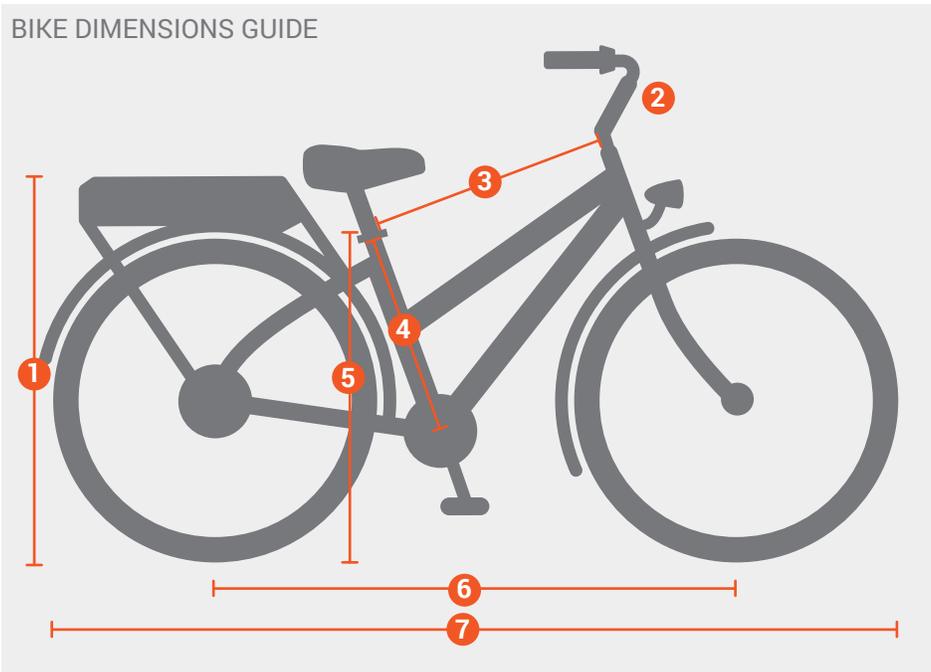

- ① REAR HEIGHT  
33" (838mm)
- ② HANDLEBAR WIDTH  
26" (660mm)
- ③ SEAT TUBE TO HANDSET  
22" (559mm)
- ④ SEAT CLAMP TO CRANK  
17" (432mm)
- ⑤ SEAT CLAMP TO GROUND  
29" (736mm)
- ⑥ AXLE TO AXLE  
44.5" (1130mm)
- ⑦ END TO END  
74" (1880mm)

## City Commuter Classic 28"

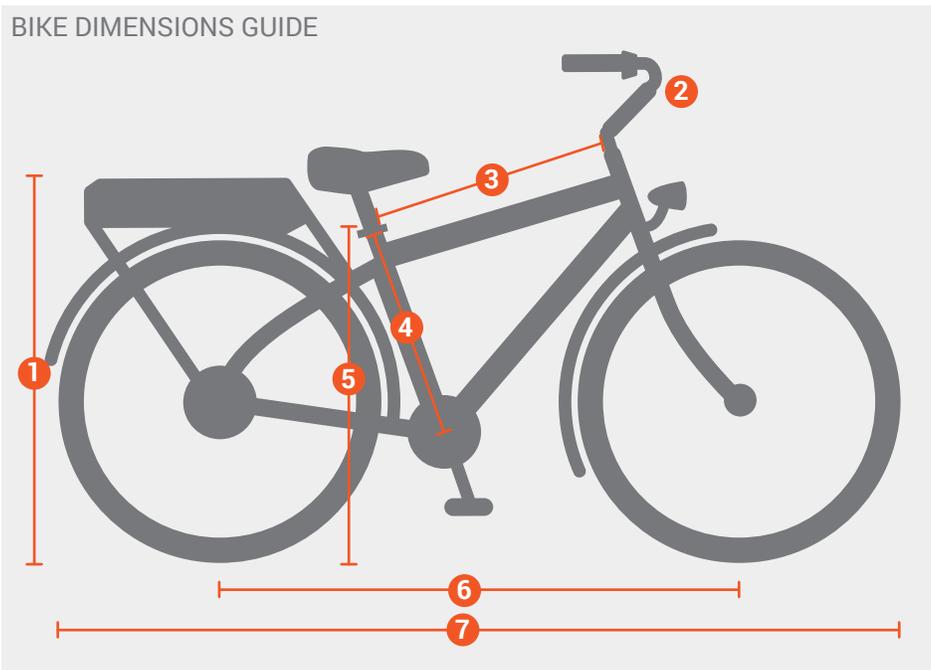

- ① REAR HEIGHT  
33" (838mm)
- ② HANDLEBAR WIDTH  
26" (660mm)
- ③ SEAT TUBE TO HANDSET  
24" (610mm)
- ④ SEAT CLAMP TO CRANK  
18" (457mm)
- ⑤ SEAT CLAMP TO GROUND  
30" (762mm)
- ⑥ AXLE TO AXLE  
47" (1194mm)
- ⑦ END TO END  
75" (1905mm)

Try one free! Find a dealer at [pedego.com](http://pedego.com)